



Surface mount thermometers ATH 63 S

Part no. 63820

Surface mount thermometers

benefits

- ranges: -20/+40, 0/60, 0/120 °C
- connection either with heat-conducting element and fastening spring, universal clamp for pipes 3/8" to 1½" or two magnets Ø 20 mm

Application

Heating, ventilation and plumbing. Fastening by means of spring (ATH Ø F), magnet (ATH Ø M) or universal clamp (ATH Ø S)

Technical Specifications

Nominal size

63

measuring element

Bimetal spiral

accuracy class

2 (EN 13190)

ranges °C

0/120

application area

Full scale value

Connection

ATH ø S
universal clamp, for pipes ¾" to 1½"

mounting position

centre back

Dial

Plastic, white
Scaling: black

Pointer

Plastic, black

Housing

ATH ø S
Sheet steel, galvanised

push on bezel

Sheet steel, nickel-plated

window


Plastic

Options

- other ranges
- Plastic housing

Technical Drawings

Centre back connection, with universal clamp for pipes 3/4" to 1 1/2"

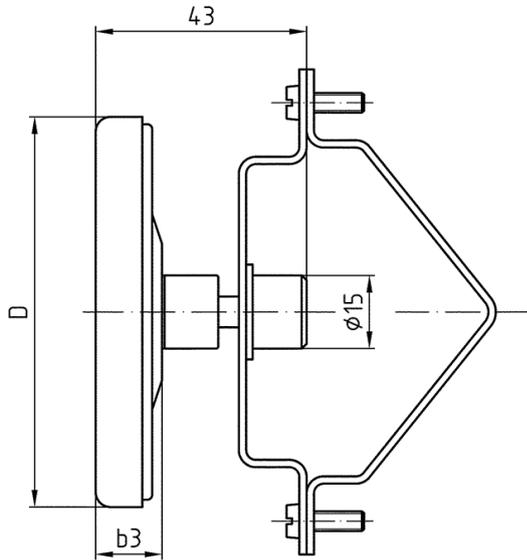

Dimensions (in mm)

Dimensions (mm)

NG	D	b3
63	63	15

Versions

housing ø	Connection	Connection	Range	dial	Type	Part no.
63 mm	universal clamp	for pipes 3/4" to 1 1/2"	0/120 °C	black	ATh 63 S	63820

- in-stock items
- Non-stock items