


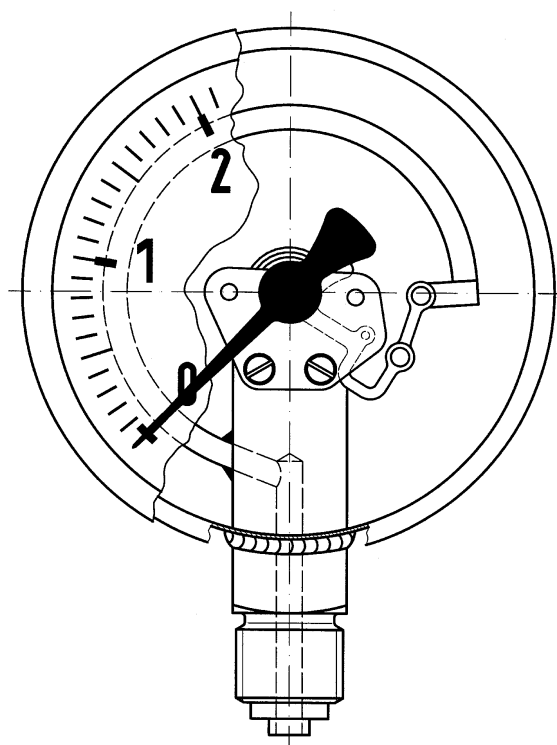

Bourdon tube pressure gauges for chemical applications RF160Ch

Part no. 85253452

Bourdon tube pressure gauges for chemical applications Type D4

benefits

- for chemical and process engineering applications
- measuring system fully welded to housing
- extremely robust design
- for temperatures of the medium of up to 200 °C
- tightness-tested with helium
- DNV- and GOSSTANDART-certified
- Ex version (optional)

Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

Technical Specifications

Type
D4

Nominal size
160

accuracy class (EN 837-1/6)
1.0

ranges (EN 837-1/5)
see ordering table

Application area NG100/160

≤ 600 bar: Full scale value
> 600 bar: $\frac{3}{4}$ x full scale value
≤ 600 bar: 0.9 x full scale value
> 600 bar: $\frac{2}{3}$ x full scale value
≤ 600 bar: 1.3 x full scale value
> 600 bar: Full scale value

Operating temperature range

Medium: max. 200 °C
Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$
falling temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$
of full scale value

Degree of protection

IP 54 (EN 60529) with housing vent ($\leq 25 \text{ bar}$)

Connection

Stainless steel 316 L, bottom back
G $\frac{1}{2}$ B, SW22 (EN 837-1/7.3)

Measuring element

Bourdon tube, stainless steel 316 Ti/316 L
 ≤ 60 bar: "C" type tube
 > 60 bar: helical tube
 tightness-tested with helium

movement

Stainless steel

Dial

Aluminium, white
 Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

bayonet bezel

Stainless steel 304

window


Laminated safety glass

Options

- back flange
- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- Ex version
- Crimped bezel, polished
- Electrical contacts
- special scales
- other process connections

Technical Drawings

bottom back connection, panel mounting bezel with clamp fixing

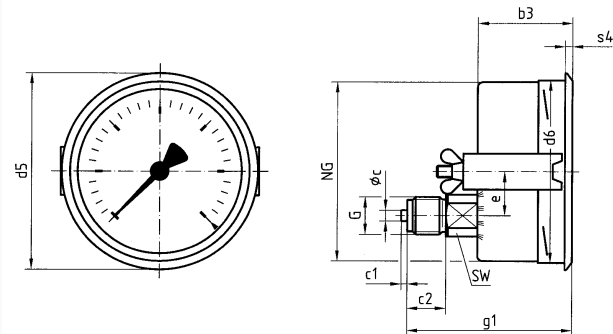

Dimensions (mm)

NG	b3	Øc	c1	c2	d5	d6	e	G	g1	s4	SW
100	49	6	3	20	107	101	34,5	G $\frac{1}{2}$ B	83	4	22
160	52	6	3	20	167	161	34,5	G $\frac{1}{2}$ B	86	4,5	22

Versions

Range	Mounting type	Type		Part number
-1/+1.5 bar	Panel mounting bezel, with clamp fixing	RF160Ch D452		85253452

-  in-stock items
-  Non-stock items