



immersion thermostat with housing GTT/7RG

Part no. 67408BX

immersion thermostat with housing

benefits

- mechanical temperature controller
- for controlling heating and cooling processes
- ideal for heat and process engineering
- Control directly at the process

Application

Mechanical temperature controller and limiter. The device is suitable for application areas in the field of heat and process engineering. Heating and cooling processes in industrial or domestic applications can be controlled directly at the process.

Description

The temperature measured at the probe causes a change in the volume of the measuring liquid. Electrical switching is triggered by the force acting. The pocket allows for direct installation in pressure-tight tanks.

Technical Specifications

Type

GTT/TC2

Operating range

see ordering table

Tolerance

± 1 K at ambient temperature 20 °C

Switching differential

$\Delta T 4 \pm 1$ K

Setting

GTT/7RG

External

Probe element

liquid-filled

Pocket

Cu alloy

Connection: 1/2-14 NPT

Diameter: $\varnothing$ 8 mm

Length: 200 mm

Operating temperature range

Probe: max. 130 °C

Housing: max. 85 °C

Process pressure

max. 4 bar

Probe
Copper

Housing
plastic (PVC), grey (RAL 7035)

Cable entry
plastic (PVC), black
M20 x 1.5

Degree of protection
IP 40 (EN 60529)

Options

- customised versions


Time constant
DIN-tested
DIN EN 14597:2012-09
registration number: TR/STB 1211

electrical switching contact
Changeover contact

Contact rating
NC: AC 250 V, 10 (2.5) A
NO: AC 250 V, 6 (2.5) A

Technical Drawings

GTT/7RG, external adjustment

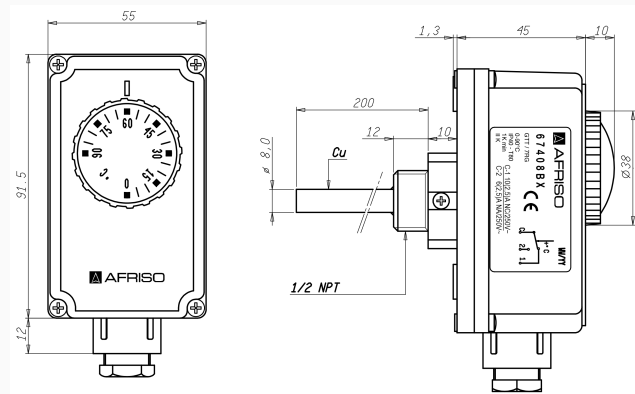

Dimensions (in mm)

Versions

	adjustment	Operating range	Switching point	Switching point	capillary length	Stem length	Part no.
immersion thermostat with housing GTT/7RG	External	0/90 °C				200 mm	67408BX

- in-stock items
- Non-stock items