



## guided micropulse level indicator PulsFox® PMG 20 KX -40

Part no. 56540400-L-101

Guided micropulse level indicators

### benefits

- Level measurement independent of changes in pressure, temperature or density
- stable, reliable measurement even with foam, vapour, dust or turbulent surfaces of the medium
- robust housing for rough ambient conditions
- maintenance-free, not subject to wear and tear

### Application

For universal continuous level measurement in containers, tanks or silos. Suitable for liquid, powdery, electrically conductive or non-conductive media. Ideal for changing media. FEP-coated and PFA-coated probes are available for corrosive, highly clean media or food. Also suitable for pressurised or vacuum tanks. The device can be easily adjusted by means of the programming display with user-friendly menus; it also serves as a local display.

### Description

PulsFox® PMG 20 level indicators operate on the basis of the guided micropulse principle (TDR, time domain reflectometry). A micropulse is emitted along a probe. The micropulse is surrounded by an electromagnetic field. Reflections of the pulses from objects and surfaces serve as the basis of distance measurement. The pulse's propagation time is directly proportional to the distance between the probe and the surface of the medium. The reflectance of materials depends on the dielectric constant  $\epsilon_r$ . Changes of the medium such as, for example vapour, dust or a turbulent surface do not affect the measuring accuracy of this measuring principle. No recalibration is required when a different medium is used. Even if properties such as pressure, temperature and density change, the system operates with high reliability and precision. PulsFox® PMG 20 has no moving parts and is therefore maintenance-free and not subject to wear.

### Technical Specifications

#### max. measuring range

KX-40

≤ 3000 mm

(specify exact probe length when ordering)

#### dielectric constant ( $\epsilon_r$ ) of medium

KX

≥ 1.8

#### Measuring accuracy

KX

± 3 mm ≤ 2 m

± 2 mm > 2 m

**Operating temperature range**

Medium: -40/+300 °C

Flange: -40/+85 °C

Ambient: -30/+70 °C

**Process pressure**

KX

max. 100 bar

**Process connection**

G1B, Stainless steel 316 Ti

**Supply voltage**

DC 18 – 36 V

**Options**

- other process connections
- FEP/PFA coatings
- EX version Ex II 1/2 G Ex ia IIB T5 Ga/Gb

**Output signal**

4–20 mA/HART, 2-wire

**material**

Probe head: aluminium die cast

KX

Stainless steel 316 Ti

**Degree of protection**


IP 67 (EN 60529)

**Electrical connection**

Cable gland M16 x 1.5

**Technical Drawings**

**PulsFox® PMG 20 KX - 40 with coax probe**

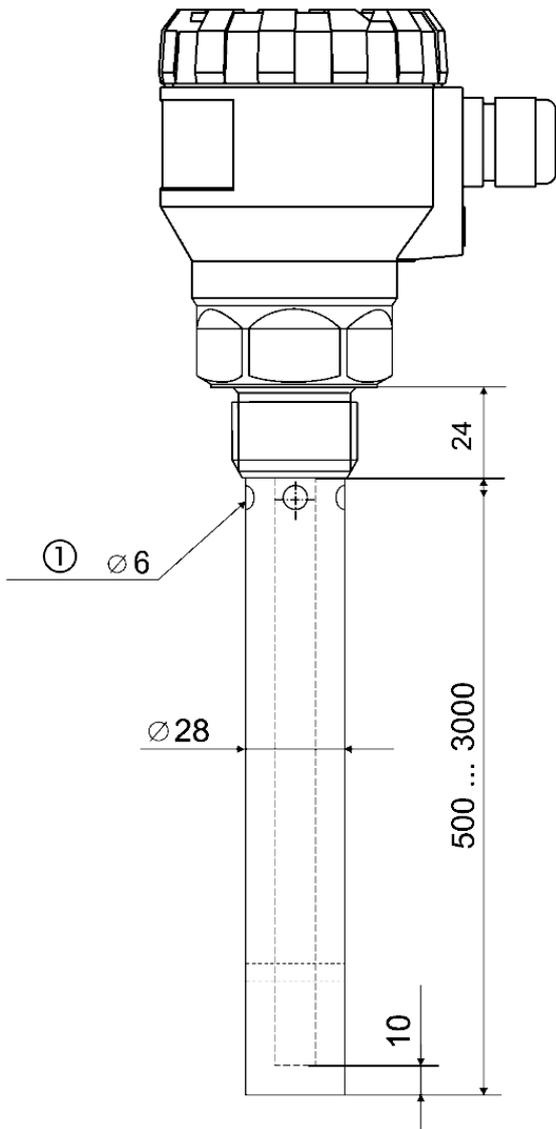

**Dimensions (in mm)**  
4 x opening

## Versions

	Part no.
PulsFox® PMG 20 KX -40	56540400-L-101

- in-stock items
- Non-stock items